FlexUV-SERIES

Most substrates Coding solutions

Cure your Coding !

Friendly user

Unique

Flexible

No maintenance



Coding Solutions
Dries on all materials

- *Print onto any surfaces*
- *Dries when exposed to UV-Light*
- ***No maintenance***
- *Industrial grade reliability*
- *Safety control of temperature*

Printing capabilities

- *Text, logo, barcodes (1D/2D)*
- *Variable data (Date, batch, counter,...)*
- *Print from 0.7 to 72 mm*
- *up to 60m/min*



Built for performance

- Innovative coding solution
- Most substrates
- I/O for integration and supervision
- Your Coding Solution...

Engineered for **Industrial marking**

www.ale.fr

ALE © 2026-UK_v1.0

FlexUV-SERIES


Technical Specifications





Specifications

Models	Flex72UV-35	Flex72UV-80
Drop Size	35pl	80pl
Performance		
Max Printing Speed	60m/min	38m/min
Printing Frequency	7.3kHz	4.3kHz
Physical		
Lowest Printing dot	32.6mm	32.6mm
Housing	Anodised Aluminum and Stainless steel	
Environmental		
Electrical Specifications	12vdc - From controller - IEEE or POE RJ45 - 24vdc/350W for LED Lamp	
Environment	From 5 to 45°C - Humidity from 0 to 90% (non-condensing)	
Conformity	IP20 - EMC Directive 2014/30/EU - ROHS 2011/65/EU Low voltage directive (LVD) 2014/35/EU	


Dimensions

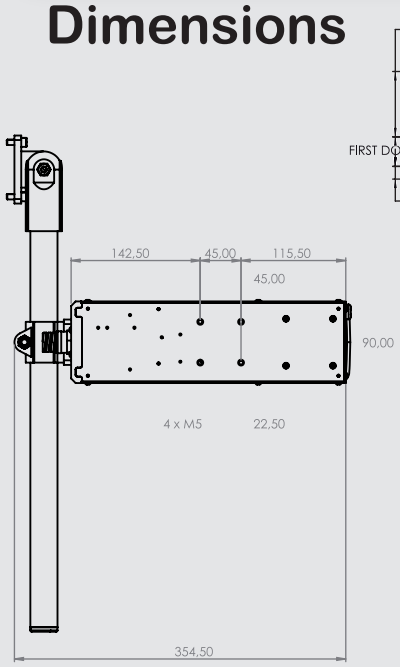


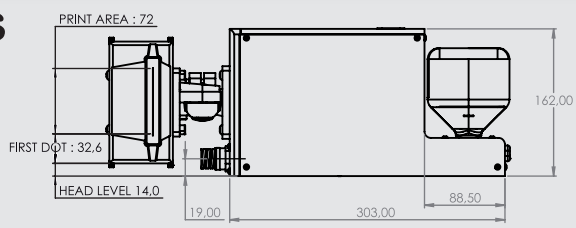

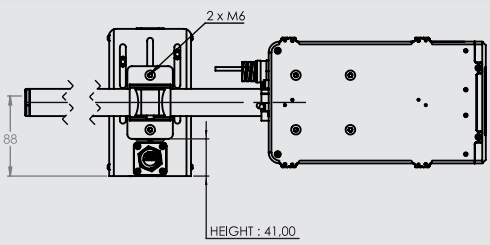

Lamp L155 x l45 x h105mm
PSU: L210 x l115 x h 30mm



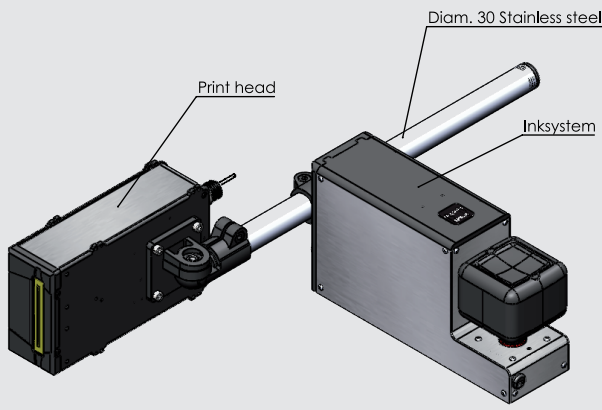

Engineered for **seamless industrial integration**

www.ale.fr

ALE sas - 651 Rue René DESCARTES - 38090 Vaulx Milieu - FRANCE
Tel:+33 (0) 437900199 - Email : contact@ale.fr - www.ale.fr

ALE © 2026-UK_v1.0